





September 2008

# ANNOUNCING

## EPA NZ3000 Wood Burning Fireplace High Country™ Series

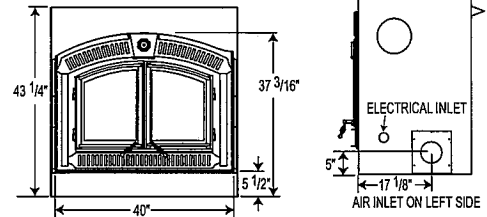

Napoleon's powerful NZ6000 wood burning fireplace is now accompanied by a smaller NZ3000 EPA certified model, perfect for rooms that require less heat than what the NZ6000 delivers. The NZ3000 features ultra high efficiencies, allowing for easily sustained overnight burns. The HIGH COUNTRY™ Series offers a superior firebox construction, guaranteed to last a lifetime. Only Napoleon® provides wood burning fireplaces that have an elegant, rustic style and are built to these high quality standards.

### FEATURES & BENEFITS

- Rugged, heavy steel firebox construction
- Fully lined refractory firebox with stainless steel secondary air chamber, completing the combustion process
- Indoor or outdoor combustion air with 1% to 100% mixing control
- Napoleon's advanced EPA wood burning technology, at 7.3 grams per hour, allows long overnight burns
- Super low burn rate feature designed to ensure clean, complete combustion even on the lowest heat output setting
- Heat radiating ceramic glass
- Andirons come standard with the unit
- Easy slide air control lever
- Optional powerful 440 CFM remote blower offers superior heat output into the room
- Optional 636 CFM central heating system that provides whole home heating, comes complete with blower, clamps, bracket, automatic damper assembly, wall mounting bracket for variable speed switch, and 120 volt wall thermostat
- Safety door switch, super low burn override switch and heat activated thermal switch for optional blower are pre-installed
- 7" flue chimney allows economical installation
- Hand-crafted wrought iron faceplate with keystone and arched double door kit available
- Optional painted black arched screen kit allows you to enjoy an open fire atmosphere
- Two piece removable baffle for easy access for chimney cleaning and maintenance
- Steel template is included with the unit to ensure proper fit for facing material
- Convenient lift handles make it easy to transport the unit
- Unit will fit through a standard 30" doorway

**For more information or to place an order call our inside sales desk at 1-888-721-7253 or visit [napoleonfireplaces.com](http://napoleonfireplaces.com)**



**NZ3000**

**NZ3000 HIGH COUNTRY™ EPA ZERO CLEARANCE WOOD BURNING FIREPLACE**

**SAFETY TESTED TO NORTH AMERICAN STANDARDS :**

**ULC S610, UL 127**

**Chimney 7" Minimum**

Unit includes: Firebrick lined firebox with stainless steel secondary air chamber, andirons, indoor or outdoor combustion air with 1% to 100% mixing control. Steel template included to ensure proper fit for facing material.

Note: safety door switch and super low burn override switch and heat activated thermal switch for optional NZ64 blower are preinstalled.

**NOTE: DOORS AND FACEPLATE MUST BE ORDERED SEPARATELY TO COMPLETE UNIT**

				US \$
PRODUCT #	MODEL DESCRIPTION	FINISH	WT/lbs.	SUGG. LIST
NZ3000	Wood burning fireplace	painted black	610	\$3,499
<b>DOORS</b>				
H336-WI	Arched double doors	wrought iron finish	55	\$999
<b>FACEPLATE</b>				
FPW13	Faceplate arched complete with grills & keystone	wrought iron finish	50	\$1,099
<b>OPTIONS/ACCESSORIES</b>				
NSK3	Arched screen kit	painted black	10	\$199
NZ220	Gravity hot air vent includes: 5' long flexible insulated aluminum air vent radiation shield, 13"x13" white grill, manual damper assembly		20	\$199
<b>Note: if installing two gravity hot air vents, two kits are required</b>				
NZ64	Air circulating blower system with decorative grill & washable filter for circulation of either interior or outside fresh air. (Safety door switch and heat activated thermal switch is included with unit)		25	\$489
<b>NOTE: NZ620-KT Required to complete blower attachment</b>				
NZ620-KT	6" x 10' outside combustion air extension kit		8	\$47
NZ62CH	Central heating system includes: blower with mounting clamps and bracket, automatic damper assembly, wall mounting bracket for variable speed switch, 120 volt wall thermostat, hardware		30	\$999
111KT	Outside air kit - 4 feet insulated flexpipe (4" dia.) with through the wall vent		3	\$76
W175-0002	8" coupler		2	\$12
NZ220-2	5"x 8" dia. long flexible insulated aluminum air vent (for gravity hot air vent)		7	\$75
W010-0067	Flexible vent support bracket		2	\$12
NM228-M	*8" Flue tile support		10	\$58
270	Paint, ThurmaloX - black 13 oz. MUST ORDER IN MULTIPLES OF 12		12	\$14
W470-0017	Paint, Wrought Iron 13 oz. MUST ORDER IN MULTIPLES OF 12		12	\$15

**\*NOTE: Flue tile support must be used with masonry installations.**

**NOTE: Heat circulating blower system must be installed during fireplace installation -Electrical components: wire, switch, etc.not supplied**

The question is what size "A" Chimney can be used on the NZ3000? The answer is either 7" or 8" diameter provided that an approved adaptor is used for the connection to the fireplace. The inside diameter of the fireplace flue collar is 8.1". Either a 7" or an 8" Stainless Steel Liner maybe used provided a positive seal is made.