




American Welding & Tank

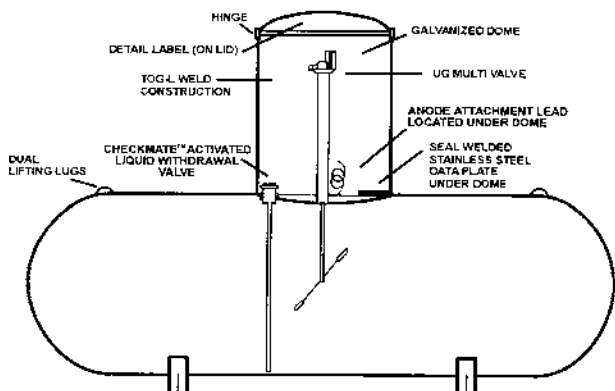

Coatings: An epoxy polyamide primer is applied and cured in a gas fired oven. This primer forms a strong bond with the metal and starts building the thickness of coating that is required for underground protection. A finish coat of green acrylic urethane is applied and cured in another gas fired oven to form a hard tough outer covering. Excellent corrosion protection can be expected as a consequence of this coating formulation, as verified by test results.

Anode Protection: Each tank comes with the anode lead already attached. Simply attach the wire from the anode bag by crimping a copper ferrule between the two wires.

Supplying New and Refurbished ASME Tanks and DOT Cylinder 12 Year Recertification's

Contact AWT Customer Service @ 800-568-2657

www.awtank.com

REPLACEMENT PARTS FOR UNDERGROUND ASME TANKS

Tank Size	Multivalve*	Check Lock Valves	AWT Float Gauge	Trinity Float Gauge	AWT Riser Dome & Cover
		Top	24" Riser	28" Riser	
RMI Part No.					
120 WG	2095A30.0	5136	1281-005	JB340A	Please Call
250 WG	2095A30.0	5136	1281-006	JB376A	AWT Dome - UG
320 WG	2095A30.0	5136	1281-006	JB376A	AWT Dome - UG
500 WG	2095A30.0	5136	1281-007	JB404D	AWT Dome - UG
1000 WG	2095A30.0	5136	1281-008	JB424C	AWT Dome - UG
1450 WG	2095A30.0	5137	JB400H	—	AWT Dome - UG
1990 WG	2095A30.0	5137	JB400H	—	AWT Dome - UG

*Must cut dip tube to D.T. length stamped on tank.

AWT UNDERGROUND TANKS

RMI Part No.	Number/ Stack	Capacity in W.G.	Overall Length	Leg Spacing	Outside Diameter	Height w/Hood	Weight (Lbs)
AWT120UGLR	6	120	5' 9"	45 ¹ / ₄ "	24"	4' 1"	257
AWT250UGLR	5	250	7' 10"	60"	30"	4' 7"	483
AWT325UGLR	5	325	9' 11"	60"	30"	4' 7"	597
AWT500UGLR	5	500	9' 11"	60"	37"	5' 2"	949
AWT850UGLR	5	850	13' 9"	86"	41"	5' 6"	1440
AWT1000UGLR	5	1000	16' 0"	121"	41"	5' 6"	1760
AWT1450UGLR	4	1450	17' 7"	139 ¹ / ₂ "	46"	5' 11"	2658
AWT1990UGLR	4	1990	23' 11"	192"	46"	5' 11"	3400

* Std. 24" Riser; Short riser is available on special request.


CYLINDERS & TANKS



American Welding & Tank

ABOVEGROUND ASME TANKS

- Epoxy primer with urethane finish for greater rust protection
- Galvanized domes
- Stainless steel seal-welded data plates
- Factory direct, dependable, on-time delivery
- RMI stocking locations for convenient pick up
- Vacuum purged for ease and safety
- New multivalve has 1/8" tapping for easy "gas check" leak testing. Optional Presto-Tap PT-RV valve installed.

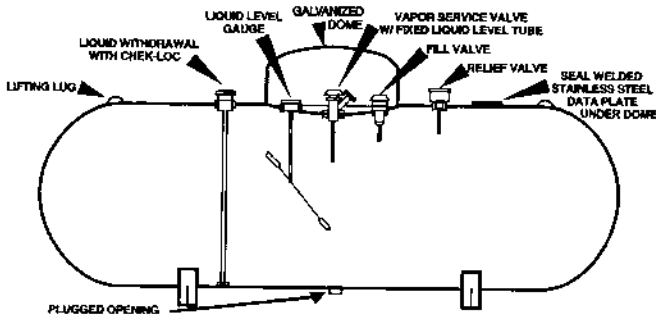

500 GALLON PROPANE TANK

HORIZONTAL ABOVEGROUND TANKS

RMI Part No.	Number/ Stack	Capacity in W.G.	Overall Length	Leg Spacing	Outside Diameter	Height w/Hood	Weight (Lbs)
AWT120AGW	16	120	5' 9"	45 1/4"	24"	4' 1"	257
AWT250AGW	9	250	7' 10"	60"	30"	4' 7"	483
AWT325AGW	9	325	9' 11"	60"	30"	4' 7"	597
AWT500AGW	8	500	9' 11"	60"	37"	5' 2"	949
AWT850AGW	5	850	13' 9"	86"	41"	5' 6"	1440
AWT1000AGW	5	1000	16' 0"	121"	41"	5' 6"	1760
AWT1450AGW	4	1450	17' 4"	139 1/2"	46"	5' 11"	2659
AWT1990AGW	4	1990	23' 11"	192"	46"	5' 11"	3400

HORIZONTAL TANK REPLACEMENT PARTS

Tank Size	Multivalve*	Check Lock Valves		Relief Valve	Filler Valve	Dome Cover
		New Style	Bottom 1 1/4"			
RMI Part No.						
120 WG	2033CLT15.0	5137	5136	623B	AWTDOME-AG	433AM
250 WG						443AM
325 WG						453AM
500 WG						(2)
850 WG						453AM
1000 WG						(2)
1450 WG						453AM
1990 WG						453AM

*Must cut dip tube to D.T. length stamped on tank.

STANDARD REPLACEMENT FLOAT GAUGES FOR ASME BULK TANKS & DOT CYLINDERS ABOVEGROUND TANKS

RMI PART NO.					Tank Size
Jr. Flange	Jr. 1 1/4" Threaded	1" Screw			
Rochester	Squibb	Sherwood	Squibb	Squibb	
6281-12-24	JA124I	2281-001	TA130A	HA130A	24" dia., 120 gal.
6281-15-30	JA154I	2281-002	TA160A	HA160A	30" dia., 250 gal.
6281-15-30	JA154I	2281-002	TA160A	HA160A	30" dia., 320 gal.
6281-19-37	JA192J	2281-003	TA194A	HA194A	37" dia., 500 gal.
6281-21-41	JA206I	2281-004	TA210A	HA210A	41" dia.r, 1000 gal.
6281-85	JA250J	--	TA254S	HA254J	420# vertical
6281-89B	JA176B	--	TA180A	HA180A	200# vertical
--	--	--	TA240A	--	45" dia., 1450/1990 gal.

CYLINDERS & TANKS

- Epoxy primer with white urethane finish for great protection
- Phenolic epoxy coated bottom
- Lifting lugs on both models

NEW 60 & 120 GALLON TANKS-AMERICAN WELDING & TANK

VERTICAL ABOVEGROUND TANKS

RMI Part No.		Number/ Stack	Capacity in W.G.	Outside Diameter	Approx. Height	Weight (Lbs)
Dome Style No.	Collar Style No.					
AWTV60	AWTV60C	16	60	24"	3' 3"	150
AWTV120	AWTV120C	9	120	30"	4'	260

VERTICAL TANK REPLACEMENT PARTS

Tank Size	Service Valve	Filler Valve		Relief Valve	Float Gauge	Optional Liquid Valve
		Bottom 3/4"	Top 1 1/4"			
RMI Part No.						
60	6555R9.1 Multivalve			445AM	HA180A	--
120	3250ALG711.0	1855SD	623B		3891-00	5136

*Must cut dip tube to D.T. length stamped on tank.

© Ray Murray Inc. Edition 11



COLLAR STYLE



DOMED STYLE